


AIR LINE

AIMCO AIR HOSE

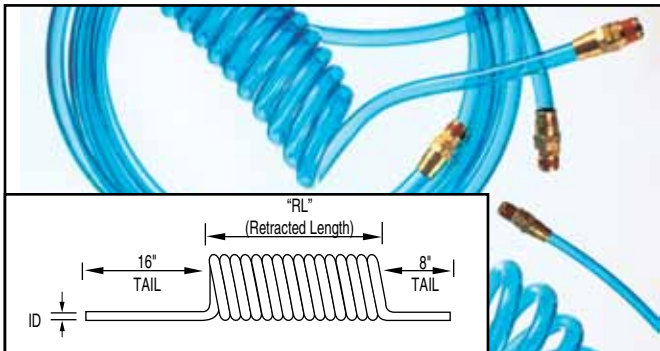

- Durable Polyurethane Hose.
- Excellent Recoil Memory.
- Maximum Flexibility and Lightweight.
- Transparent Hose Color (opaque available).
- Custom Colors Available.
- High Chemical Resistance.

SINGLE AIR HOSE ASSEMBLIES (COILED)

MODEL	WORKING PRESSURE 100PSI	DESCRIPTION (OD X ID X LENGTH)	RETRACTED LENGTH	NPT FITTINGS
ASH-250C-10MSZ		3/8" x 1/4" x 10'	7"	1/4"
ASH-250C-15MSZ		3/8" x 1/4" x 15'	9 1/2"	1/4"
ASH-250C-25MSZ		3/8" x 1/4" x 25'	15 1/2"	1/4"
ASH-375C-15MSZ		9/16" x 3/8" x 15'	10"	3/8"
ASH-375C-25MSZ		9/16" x 3/8" x 25'	14"	3/8"
ASH-500C-15MSZ		3/4" x 1/2" x 15'	13"	1/2"
ASH-500C-25MSZ		3/4" x 1/2" x 25'	23"	1/2"

SINGLE AIR HOSE (COILED) CUSTOM LENGTHS

Custom length coil assemblies and special colors are available in minimum order quantities.

STRAIGHT AIR HOSE (SOLD PER FOOT)

MODEL	DESCRIPTION
ASH-250Z	1/4" I.D.
ASH-375Z	3/8" I.D.
ASH-500Z	1/2" I.D.

- Assemblies include reusable swivel fitting.
- Burst pressure 428 PSI @ 68° F.
- Working temperature: -104° F to 175° F.
- Straight hose is available by the foot with, or without, hose fittings.
- Ask about full reel pricing.

AIR HOSE FITTINGS

MODEL	CAPACITY
250-RZ	1/4" NPT Rigid Fitting
250-SZ	1/4" NPT Swivel Fitting
375-RZ	3/8" NPT Rigid Fitting
375-SZ	3/8" NPT Swivel Fitting
500-RZ	1/2" NPT Rigid Fitting
500-SZ	1/2" NPT Swivel Fitting

HELPFUL HINTS FOR AIR HOSE USE:


- Use recommended ID air hose and fittings.
- Replace air hose regularly to help maintain clean air.
- A clear hose allows you to see water or dirt accumulation in hose.
- Use correct length of hose to reduce air loss and pressure drop.
- Use locking quick disconnect couplers for additional safety.

ERGONOMIC TWIST PLUGS

These unique, ergonomically designed hose fittings provide 360° rotation and 35° angled rotation in any direction.



MODEL	DESCRIPTION
TS-20NP-3NPT	1/4" NPT Female x 3/8" NPT Male
TS-30NP-2NPT	3/8" NPT Female x 1/4" NPT Male
TS-20NP-2NPT	1/4" NPT Female x 1/4" NPT Male
TS-20US-2NPT	1/4" US Plug x 1/4" NPT Male
TS-20US-3NPT	1/4" US Plug x 3/8" NPT Male
TS-30US-2NPT	3/8" US Plug x 1/4" NPT Male
TS-30US-3NPT	3/8" US Plug x 3/8" NPT Male

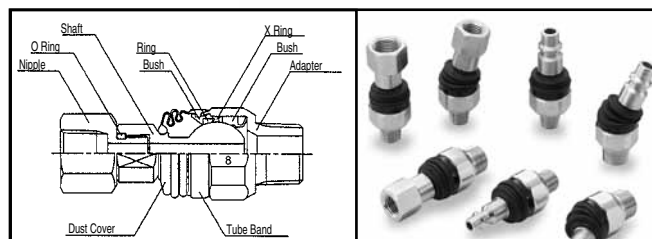

- Two rotation points prevent kinking of air hose.
- Design ensures full air pressure flow.
- Rotating joint comes with polyurethane dust cover.
- Heavy duty construction for maximum life.

QUICK COUPLERS

Manual ball couplers designed for use with ergonomic twist plugs. Brass with nitrile seals, rated to 300 PSI, from -40° to +250° F.



MODEL	DESCRIPTION
B23	1/4" NPT F x 1/4" QC Brass Coupler
B23E	1/4" NPT F x 3/8" QC Brass Coupler
B25	3/8" NPT F x 3/8" QC Brass Coupler

AIR LINE ACCESSORIES

IN-LINE MINI LUBRICATORS

These mist type inline lubricators keep air operated tools performing with greater efficiency. The patented "on the tool" mist lubricator system is more cost effective.



MODEL	DESCRIPTION	WEIGHT	LENGTH	NPT	TOOL CFM
7006	Mini Lube	2 1/2 oz	2 1/4	1/4	3 - 7
7007	Midget Lube	3 1/2 oz	2 1/2	1/4	7 - 15
7008	Master Lube	5 oz	3 1/4	3/8	15 - 30

IN-LINE MINI REGULATORS

Easily adjust airflow with the turn of a dial.



MODEL	CAPACITY
932-100-0	1/8" NPT
932-110-0A	1/4" NPT

SWIVEL AIR FITTINGS GAUGES

For use with most portable air tools, including screwdrivers, drills, grinders, sanders, buffers, staple guns, and more. Rotates 360° for awkward angles.



MODEL	INLET	WEIGHT	MAX PSI	TOOL CFM
7021	1/4" NPT	3 oz	Up to 125	25
7021AG	1/4" NPT	3 oz	Up to 125	25
7041A	3/8" NPT	11 oz	Up to 125	50
7041AG	3/8" NPT	3 oz	Up to 125	50
7051	1/2" NPT	7 oz	Up to 125	60

FITTINGS AND ADAPTERS

Brass pipe fittings for use as medium and low pressure connectors. Meets functional requirements of SAE J530, SAE J531, ASME and ASA. Rated 1,000 PSI from -65° to +250° F.



MODEL	DESCRIPTION
222P-6-4	3/8 NPT F x 1/4 NPT M Adapter
222P-8-6	1/2 NPT F x 3/8 NPT M Adapter
222P-12-8	3/4 NPT F x 1/2 NPT M Adapter
208P-6-4	1/4 NPT F x 3/8 NPT M Bushing
208P-8-6	3/8 NPT F x 1/2 NPT M Bushing

MINI AIR GAUGE SWIVEL JOINT KITS

- Bi-directional 360° rotation.
- Keeps air hose straight and untwisted.
- Decreases operator fatigue.



MODEL	DESCRIPTION
7021AG	1/4 PT/NPT
7041AG	3/8 PT/NPT