


# IMPACT TYPE SCREWDRIVERS

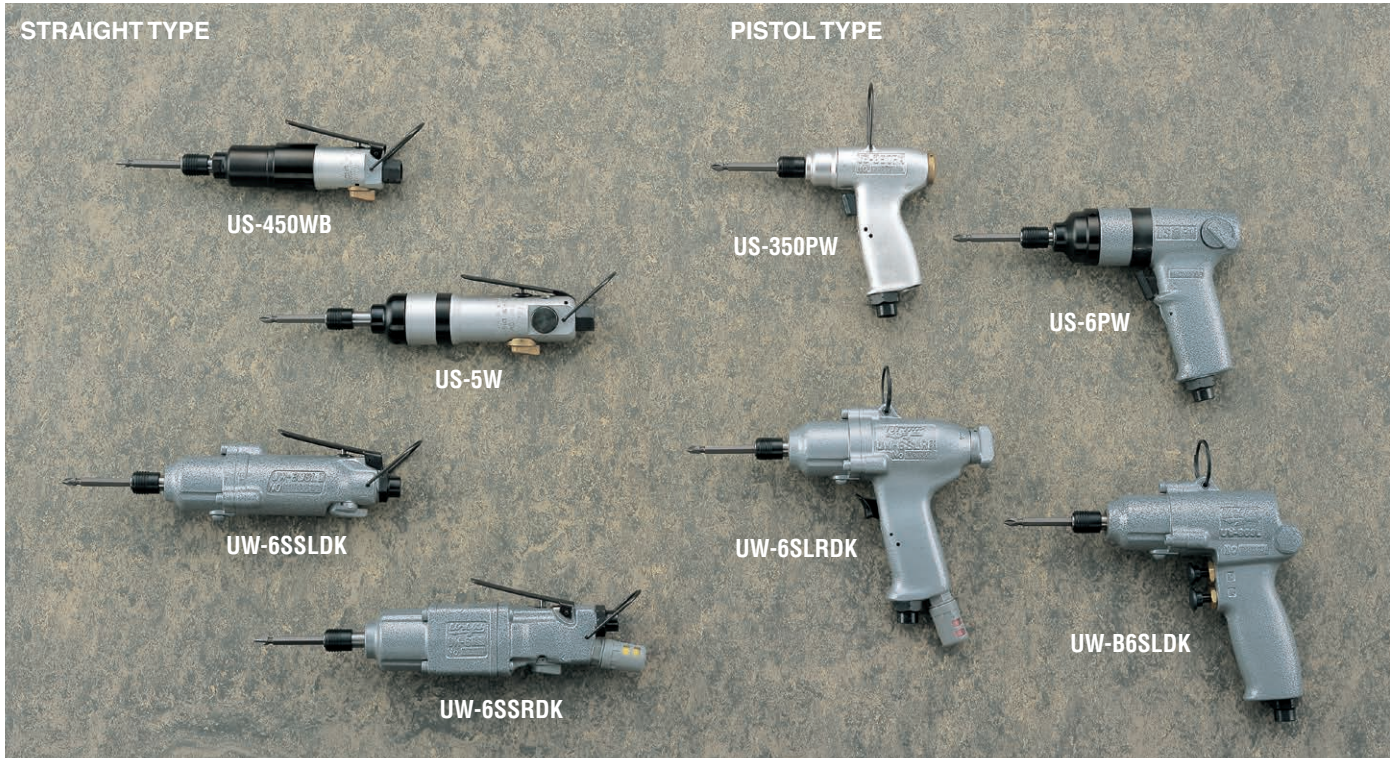

## SPECIFICATIONS (STRAIGHT TYPE)

Model	Capacity (Screw Size)		Free Speed (Approx.) rpm	Overall Length (about)		Weight Less Bit (about)		From Center to Outside (about)		Hex. Size of Bit		Air Hose Size (inside Dia)		Average Air Consumption		Recommended Air Pressure	
	mm	in		mm	in	kg	lb	mm	in	mm	in	mm	in	m³/min	ft³/min	Mpa	psi
US-350W	4	No.8	14000	168	6 5/8	0.40	0.88	17.0	43/64	6.35	1/4	6.35	1/4	0.20	7.0	0.4	57
US-450WB	5	No.10	11000	161	6 5/16	0.55	1.21	18.5	47/64	6.35	1/4	6.35	1/4	0.20	7.0	0.4	57
US-45W	5	No.10	12000	183	7 13/64	0.50	1.10	17.0	43/64	6.35	1/4	6.35	1/4	0.20	7.0	0.4	57
US-5W	5	No.10	9500	198	7 51/64	0.80	1.60	20.0	27/32	6.35	1/4	6.35	1/4	0.20	7.0	0.4	57
US-6W	6	1/4	9500	187	7 23/64	0.80	1.76	22.5	57/64	6.35	1/4	6.35	1/4	0.30	10.5	0.4	57
UW-6SSLRDK	6	1/4	8500	245	9 21/32	0.87	1.98	31.0	1 7/32	6.35	1/4	9.5	3/8	0.30	10.5	0.6	85
UW-6SSRDK	6	1/4	7500	241	9 31/64	0.97	2.20	29.5	1 5/32	6.35	1/4	9.5	3/8	0.30	10.5	0.6	85
UW-6SSHRDK	8	5/16	7300	265	10 7/16	1.26	2.75	27.5	1 5/64	6.35	1/4	9.5	3/8	0.35	12.4	0.6	85
UW-6SSLDK	6	1/4	8500	203	7 63/64	0.90	1.98	31.0	1 7/32	6.35	1/4	9.5	3/8	0.30	10.5	0.6	85
UW-6SSDK	6	1/4	7500	202	7 61/64	1.00	2.20	28.0	1 7/64	6.35	1/4	9.5	3/8	0.30	10.5	0.6	85
UW-6SSHDK	8	5/16	7500	220	8 21/32	1.25	2.86	27.5	1 5/64	6.35	1/4	9.5	3/8	0.35	12.4	0.6	85

Air Inlet Size : NPT1/4"

## SPECIFICATIONS (PISTOL TYPE)

Model	Capacity (Screw Size)		Free Speed (Approx.) rpm	Overall Length (about)		Weight Less Bit (about)		From Center to Outside (about)		Hex. Size of Bit		Air Hose Size (inside Dia)		Average Air Consumption		Recommended Air Pressure	
	mm	in		mm	in	kg	lb	mm	in	mm	in	mm	in	m³/min	ft³/min	Mpa	psi
US-350PW	4	No.8	15000	121	4 49/64	0.53	1.16	17.0	43/64	6.35	1/4	6.35	1/4	0.20	7.0	0.4	57
US-450PW	5	No.10	14000	151	5 15/16	0.75	1.65	17.0	43/64	6.35	1/4	6.35	1/4	0.20	7.0	0.4	57
US-5PW	5	No.10	9500	168	6 5/8	0.95	2.10	20.0	25/32	6.35	1/4	6.35	1/4	0.30	10.5	0.4	57
US-6PW	6	1/4	9500	170	6 11/16	1.00	2.20	23.0	57/64	6.35	1/4	6.35	1/4	0.30	10.5	0.4	57
US-652PW	6	1/4	9000	155	6 7/64	0.85	1.87	23.0	15/16	6.35	1/4	6.35	1/4	0.35	8.8	0.5	57
UW-6SLRDK	6	1/4	8500	182	7 11/64	0.97	2.13	31.0	1 7/32	6.35	1/4	9.5	3/8	0.30	10.5	0.6	85
UW-6SHBRDK	8	5/16	7300	170	6 11/16	1.36	2.99	28.0	1 7/64	6.35	1/4	9.5	3/8	0.35	12.4	0.6	85
UW-6SLDK	6	1/4	8500	182	7 11/64	0.97	2.13	31.0	1 7/32	6.35	1/4	9.5	3/8	0.30	10.5	0.6	85
UW-B6SLDK	6	1/4	8500	173	6 13/16	1.00	2.20	31.0	1 7/32	6.35	1/4	9.5	3/8	0.30	10.5	0.6	85
UW-6SDK	6	1/4	7500	186	7 21/64	1.22	2.68	27.5	1 5/64	6.35	1/4	9.5	3/8	0.30	10.5	0.6	85
UW-6SADK	6	1/4	7500	150	5 29/32	1.10	2.47	27.5	1 5/64	6.35	1/4	9.5	3/8	0.30	10.5	0.6	85
UW-6SHDK	8	5/16	7500	190	7 31/64	1.45	3.10	28.0	1 7/64	6.35	1/4	9.5	3/8	0.35	12.4	0.6	85

Air Inlet Size : NPT1/4"