


OIL-PULSE TYPE SCREWDRIVERS

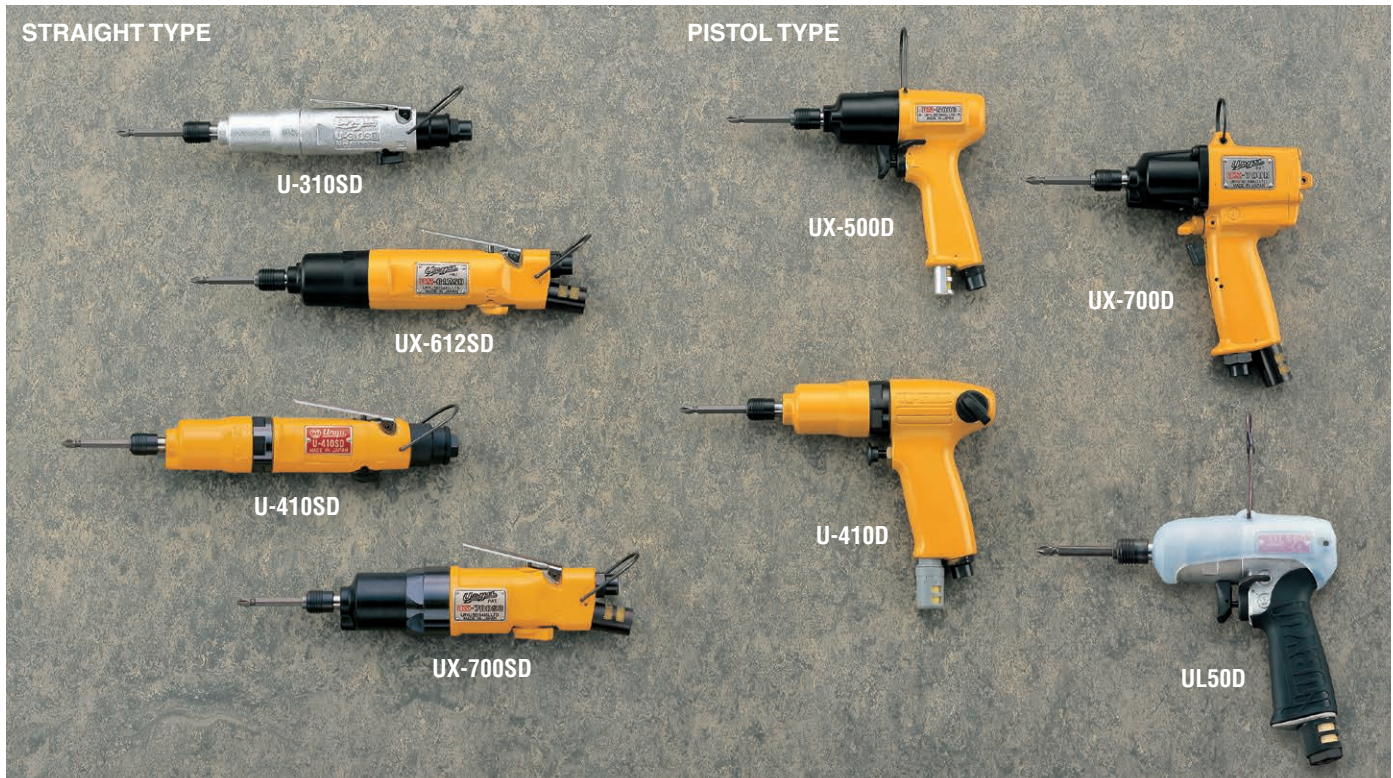

SPECIFICATIONS (STRAIGHT TYPE)

Recommended Air Pressure:0.6MPa(85psi)

Model	Capacity (Screw Size)		Torque Range		Free Speed (Approx.) rpm	Overall Length (about)		Weight Less Bit (about)		From Center to Outside (about)		Air Hose Size (inside Dia)		Average Air Consumption	
	mm	in	Nm	ft-lbs		mm	in	kg	lb	mm	in	m ³ /min	ft ³ /min	dB(A)	m/sec ²
U-310SD	3-4	No.5-No.8	2.50-3.10	1.8-2.2	11000	222	8 45/64	0.62	1.50	18.0	47/64	9.5	3/8	0.15	5.3
U-350SD	3-4	No.5-No.8	3.50-5.80	2.6-3.1	10500	238	9 3/8	0.71	1.50	22.0	47/64	9.5	3/8	0.15	5.3
U-410SD	4-5	No.8-10	7.00-10.0	5.2-7.4	10500	240	9 27/32	0.80	1.80	22.0	7/8	9.5	3/8	0.15	5.3
UX-450SD	5	No.10	8.00-14.0	5.9-10.4	9500	239	9 11/64	0.80	1.80	22.0	7/8	6.35	1/4	0.20	7.0
UX-500SD	5-6	No.10-1/4	13.0-20.0	9.6-14.8	9300	244	9 39/64	0.92	2.00	22.0	7/8	6.35	1/4	0.25	8.8
UX-612SD	6-8	1/4-5/16	16.0-28.0	11.9-20.8	9300	253	9 61/64	1.00	2.20	23.0	29/32	6.35	1/4	0.30	10.7
UX-700SD	8	5/16	20.0-36.0	14.6-26.6	9000	249	9 51/64	1.27	2.80	26.5	1 3/64	6.35	1/4	0.35	12.3
UL30SD	5	No.10	6.00-12.0	4.4-8.9	5000	209	8 15/64	0.62	1.40	20.5	51/64	6.5	1/4	0.23	8.1
UL40SD	5-6	No.10-1/4	9.00-20.0	6.7-14.8	5000	209	8 15/64	0.62	1.40	20.5	51/64	6.5	1/4	0.23	8.1
UL50SD	6-8	1/4-5/16	18.0-28.0	13.3-20.7	6400	214	8 27/64	0.74	1.60	22.0	7/8	6.5	1/4	0.35	19.3
UL60SD	8	5/16	22.0-35.0	16.3-25.9	6700	212	8 11/32	0.77	1.70	22.0	7/8	8.0	5/16	0.45	15.8

Air Inlet Size : NPT1/4" Hex. Size of Bit : 6.35mm (1/4")

SPECIFICATIONS (PISTOL TYPE)

Recommended Air Pressure:0.6MPa(85psi)

Model	Capacity (Screw Size)		Torque Range		Free Speed (Approx.) rpm	Overall Length (about)		Weight Less Bit (about)		From Center to Outside (about)		Air Hose Size (inside Dia)		Average Air Consumption	
	mm	in	Nm	ft-lbs		mm	in	kg	lb	mm	in	m ³ /min	ft ³ /min	dB(A)	m/sec ²
U-350D	3-4	No.5-No.8	3.5-5.8	2.6-4.3	11500	154	6 1/16	0.76	1.60	22.0	7/8	6.35	1/4	0.15	5.3
U-410D	4-5	No.8-10	7.0-10.0	5.2-7.4	10000	188	7 13/32	1.00	2.20	22.0	7/8	6.35	1/4	0.15	5.3
UX-450D	5	No.10	8.0-14.0	5.9-10.4	9500	152	5 63/64	0.85	1.90	22.0	7/8	6.35	1/4	0.20	7.0
UX-500D	5-6	No.10-1/4	13.0-20.0	9.6-14.8	9300	152	5 63/64	0.85	1.90	22.0	7/8	6.35	1/4	0.25	8.8
UX-612D	6-8	1/4-5/16	16.0-28.0	11.8-20.7	9300	165	6 1/2	0.95	2.10	23.0	29/32	6.35	1/4	0.30	10.5
UX-700D	8	5/16	20.0-36.0	14.8-26.6	9000	174	6 27/32	1.38	3.00	26.0	1.00	6.35	1/4	0.35	12.3
UL30D	5	No.10	6.0-12.0	4.4-8.9	5700	137	5 25/64	0.70	1.5	20.5	13/16	6.35	1/4	0.20	7.0
UL40D	5-6	No.10-1/4	11.0-20.0	8.1-14.8	6100	137	5 25/64	0.70	1.5	20.5	13/16	6.35	1/4	0.20	7.0
UL50D	6-8	1/4-5/16	18.0-28.0	13.3-20.7	6500	146	5 3/4	0.77	1.7	22.0	55/64	6.35	1/4	0.30	10.5
UL60D	8	5/16	22.0-35.0	16.3-25.9	6700	143	5 5/8	0.82	1.8	22.0	55/64	8.0	5/16	0.40	14.0

Air Inlet Size : NPT1/4" Hex. Size of Bit : 6.35mm (1/4")